


04/14/00



Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

CUSTOMIZING A DIGITAL CAMERA

First Named Inventor (or Application Identifier):

Grish V. Prabhu, et al

UTILITY PATENT APPLICATION  
TRANSMITTAL UNDER 37 CFR 1.53(b)

ATTORNEY DOCKET 79556PRC

Express Mail Label No.

EL267111675US

Date: April 14, 2000

JCS86 U.S. PTC  
09/549356  
04/14/00

Enclosed are:

1. ☒ Specification
2. ☒ 12 Sheet(s) of drawing(s)
3. ☐ Information Disclosure Statement Under 37 CFR 1.97.
4. Combined Declaration for Patent Application and Power of Attorney:
  - 4a. ☐ New
  - 4b. ☐ Copy from a prior application (37 CFR 1.63(d) (for continuation/divisional with Box 11 completed))
5. ☐ Incorporation by Reference (useable if Box 4b is checked)
6. ☐ Assignment of the invention to Eastman Kodak Company
7. ☐ Certified copy of a priority
8. ☐ Associate Power of Attorney

10. ☐ The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

9. ☐ Deletion of Inventor(s).

Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

10. ☒ If a 111A application prior to examination of the above-identified application, amend the specification at Page 1, after the title, by inserting the following:  
--CROSS REFERENCE TO RELATED APPLICATION  
Reference is made to and priority claimed from U.S. Provisional Application Serial No. , filed , entitled .

If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

11. ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ,
12. ☒ Please address all written communications to Thomas H. Close, Patent Legal Staff, Eastman Kodak Company, 343 State Street, Rochester, NY 14650-2201.  
Please Direct all telephone calls to Pamela R. Crocker at (716) 477-0553.

The filing fee has been calculated as shown below:

FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 690
TOTAL CLAIMS	41 - 20 =	21	x 18 =	\$ 378
INDEPENDENT CLAIMS	5 - 3 =	2	x 78 =	\$ 156
MULTIPLE DEPENDENT CLAIM PRESENTED			+ 260	\$0
			<b>TOTAL</b>	<b>\$ 1224</b>

- ☒ Please charge my Eastman Kodak Company Deposit Account No. 05-0225 in the amount of \$ 1224 .

A duplicate copy of this sheet is enclosed

- ☒ The Commissioner is hereby authorized to charge any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Eastman Kodak Company Deposit Account No. 05-0225.

A duplicate copy of this sheet is enclosed.

Pamela R. Crocker/phw  
Telephone: (716) 477-0553  
Facsimile: (716) 477-4646

Pamela R. Crocker  
Attorney for Applicants  
Registration No. 42,447

REGULAR Application Based on Docket **79556PRC**

Inventors: Girish V. Prabhu, Michael E. Miller, Su Y. Akyuz, John L. Wasula,  
Anthony L. Tintera and Kenneth A. Parulski

**CUSTOMIZING A DIGITAL CAMERA**

Commissioner for Patents,  
ATTN: BOX PATENT APPLICATION  
Washington, D. C. 20231

Express Mail Label No.: EL267111675US

Date: April 14, 2000

## **CUSTOMIZING A DIGITAL CAMERA**

### **CROSS REFERENCE TO RELATED APPLICATIONS**

Reference is made to commonly-assigned U.S. Provisional Patent  
5 Application Serial No. 60/137,094, filed June 2, 1999, entitled "Method and  
Apparatus for Customized Automation of Digital Image Transfer" to Wasula et  
al., commonly-assigned U.S. Patent Application Serial No. 09/272,855, filed  
March 19, 1999, entitled "A Method For Selectively Or Automatically Matching  
The Characteristics Of A Display To A Language" by Prabhu et al., commonly-  
10 assigned U.S. Patent Application Serial No. \_\_\_\_ (Docket 80722), filed \_\_\_\_\_,  
entitled "Configuring and Purchasing Imaging Devices" by Parulski, commonly-  
assigned U.S. Patent Application Serial No. \_\_\_\_ (Docket 80723), filed  
\_\_\_\_\_, entitled "Purchasing Configured Photographic Film Products" by  
Parulski, and commonly-assigned U.S. Patent Application Serial No. \_\_\_\_  
15 (Docket 80724), filed \_\_\_\_\_, entitled "Leasing A Configured Camera" by  
Parulski, the disclosures of which are herein incorporated by reference.

### **FIELD OF THE INVENTION**

This invention relates generally to the field of digital cameras, and  
20 in particular, to customizing digital cameras for particular users.

### **BACKGROUND OF THE INVENTION**

Digital cameras, such as the Kodak DC260™ digital camera, sold  
by the Eastman Kodak Company, enable images to be utilized on a home personal  
25 computer (PC), printed locally or remotely, and incorporated into e-mail  
documents and personal World-Wide-Web home pages which can be accessed via  
the Internet. The camera's graphic user interface (GUI) enables many different  
features to be selected, but it is complicated, and thus, very difficult for a first-time  
user to understand. The camera provides a fixed set of features to the end user.  
30 These features can be controlled by Digita Scripts specified by Flashpoint, Inc.  
Digita Scripts are ASCII text files created with a text editor on a host computer.  
Such Scripts may be invoked to select particular camera features and to perform a

defined sequence of camera operations. For example, a Script may capture an exposure series of still pictures using different exposure settings.

This type of camera design presents several problems, including the fact that any feature that is likely to be demanded by even a small subset of the users must be included in the camera. A consequence of this is that the complexity of digital cameras has increased. This leads to an increase in user anxiety, and therefore, serves as a barrier to market adoption.

The firmware in the DC260™ digital camera, for example, can be replaced via a memory card, as described in commonly-assigned U.S. Patent No. 5,477,264, entitled "Electronic Imaging System Using A Removable Software-Enhanced Storage Device," the disclosure of which is herein incorporated by reference. Images can be assigned to albums, as described in commonly-assigned U.S. Patent No. 5,633,678, entitled "Electronic Still Camera For Capturing And Categorizing Images," the disclosure of which is herein incorporated by reference.

Commonly-assigned U.S. Patent Application Serial No. 08/977,382, filed November 24, 1997 (Kodak Docket 75,276), entitled "Electronic Camera With Utilization Selection Capability" and U.S. Patent Application Serial No. \_09/004,046, filed January 7, 1998 (Kodak Docket 75,275), entitled "Network Configuration File for Automatically Transmitting Images from an Electronic Still Camera" to Ward et al., the disclosures of which are herein incorporated by reference, disclose digital cameras which are provided with host software that enables templates, e-mail addresses, and other information to be selected at the host computer, downloaded to the digital camera, and used, for example, to automatically produce prints and e-mail images. Although this enables user-selected information (such as preferred templates and personalized e-mail addresses) to be downloaded to the digital camera, the actual features of the digital camera normally remain the same for all users who have the same camera model.

## SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to customize a digital camera to include only the features desired by the user, and to be personalized with user preferences, such as color background, icons, and names.

- 5 It is a further object of the present invention to enable a user to easily add or remove the features that the user wants or does not want, respectively, to try new features, to keep only the features that are of interest to the user, and to add a feature to the digital camera after purchase that was not available at the time of purchase. In addition, it is an object of the present invention to enable the customer or retailer to customize the digital camera.

- 10 It is yet another object of the present invention to enable a digital camera retailer to offer camera packages, or bundles of software, that meet the needs of specific groups of their well-known clientele, and to sell new firmware components at the point of sale that they believe to be popular.

- 15 These objects are achieved by a method for customizing a digital camera for at least one particular user, the digital camera including a reprogrammable memory for storing firmware which controls the operation of the digital camera and a camera graphical user interface responsive to the firmware stored in the reprogrammable memory, the firmware including at least one firmware component, the method comprising the steps of:

- 20 (a) providing customization software executed external to the digital camera which can access a plurality of firmware components providing different camera features;
- (b) the user selecting desired camera features to cause the customization software to access the corresponding firmware component(s); and
- 25 (c) providing the selected corresponding firmware component(s) to the digital camera and reprogramming the reprogrammable memory of the digital camera to store the corresponding firmware component(s) to thereby customize the digital camera.

30

### ADVANTAGES

It is an advantage of the present invention for a particular user to

customize the look and feel of a digital camera, and the features offered by the digital camera.

It is another advantage of the present invention for a particular user to customize a digital camera to include only those features that are of interest to the user. Therefore, a novice user can customize a digital camera to provide a very simple set of features, and a more advanced user can customize a digital camera to include a more complex set of features.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a digital imaging system in accordance with the present invention for providing a user customizable digital camera 10;

FIG. 2 is a flow diagram depicting the steps used in customizing the digital camera 10 of FIG. 1;

FIG. 3 illustrates a graphical screen displayed on the display monitor 52 of FIG. 1 in the process of customizing the digital camera 10 of FIG. 1;

FIGS. 4A and 4B illustrate two different camera graphical user interface screens displayed on the color image display 22 of the digital camera 10 of FIG. 1 for two different users;

FIG. 4C is a rear view of the digital camera 10 including the color image display 22;

FIG. 5 illustrates an additional graphical screen displayed on the display monitor 52 of FIG. 1 in the process of customizing the digital camera 10 of FIG. 1, which includes a depiction of the camera graphical user interface of the digital camera 10 of FIG. 1;

FIG. 6 illustrates an alternative embodiment of several steps of the process depicted in FIG. 2;

FIG. 7 depicts several graphical screens used in the process of FIG. 6;

FIG. 8 is a flow diagram depicting image processing operations performed within the digital camera 10 of FIG. 1;

FIG. 9 depicts three tone correction curves that can be used in

block 530 of FIG. 8; and

FIG. 10 depicts three Coring look-up tables that can be used in block 540 of FIG. 8.

## 5 DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a block diagram of a digital imaging system in accordance with the present invention, which enables users to easily customize the interface and features of their digital camera prior to taking pictures. The digital imaging system includes a digital camera 10 which is supplied along with camera customization software provided on a compact disc CD-ROM 32, a floppy disk 34, or other digital media. The digital imaging system also includes a host computer 40, such as a Dell Dimension XPS M200, and a Network Service Provider 70. In accordance with the present invention, camera customization software is executed external to the digital camera 10, and is typically executed on the host computer 40. The camera customization software accesses software code which permits firmware in the digital camera 10 to be customized by a user. The software code can be source code which is compiled by the camera customization software to create executable firmware. Alternatively, the software code can be compiled firmware components or firmware settings which are accessed by the camera customization software. The camera customization software can modify or combine firmware components in order to provide firmware which customizes the digital camera 10. The camera customization software also includes one or more applications that provide a series of interactive dialogues with the user so that the user may learn about available camera features and select features of interest.

The digital camera 10 produces digital images that are stored on a removable memory card 30. The digital camera 10 includes an optical viewfinder 11 (shown in FIG. 4C) for composing a scene (not shown), a 3:1 zoom lens 12 controlled by a zoom switch 13 (shown in FIG. 4C) having telephoto (T) and wide angle (W) positions and having zoom and focus motor drives (not shown), and an adjustable aperture and shutter (not shown) for focusing light from

a scene on an image sensor 14. The image sensor 14 can be, for example, a single-chip color charge-coupled device (CCD), using the well-known Bayer color filter pattern. When the user depresses a shutter button 15 (shown in FIG. 4C), the analog output signal from the image sensor 14 is converted to digital data by an analog-to-digital (A/D) converter 16. The digital data is processed by a processor 18 controlled by firmware stored in a reprogrammable memory, such as a Flash EPROM 28.

The processed digital image file is provided to a memory card interface 20 which stores the digital image file on the removable memory card 30 or on another type of digital memory device, such as a floppy disk or magnetic hard drive. The removable memory card 30, which is well-known to those skilled in the art, can include, for example, a memory card adapted to the PCMCIA card interface standard, as described in the *PC Card Standard, Release 2.0*, published by the Personal Computer Memory Card International Association, Sunnyvale, California, September 1991. The removable memory card 30 can also be adapted to the Compact Flash interface standard, such as described in the *CompactFlash Specification Version 1.3*, published by the CompactFlash Association, Palo Alto, California, August 5, 1998, or to other memory devices such as the well-known SSFDC (Solid State Floppy Disc Card) or Memory Stick formats.

The processor 18 performs color interpolation followed by color and tone correction, in order to produce rendered sRGB image data. This processing is described later with reference to FIG. 8. The processor 18 can include internal buffer memory to store a portion of the image, or to store one or more images. Alternatively, the processor 18 can use a separate external memory (not shown), such as DRAM memory. The rendered sRGB image data is then JPEG compressed and stored as a JPEG image file on the removable memory card 30. The processor 18 also provides a lower resolution or "thumbnail" size image data to a color image display 22, such as a color liquid crystal display (LCD), which displays the captured image for the user to review. A camera user interface 24 including a series of user buttons 80, 81, 82, 83, and 84 (shown in FIG. 4C) and a capture/review mode switch 86 (shown in FIG. 4C), is used to



control the digital camera 10. The camera user interface 24, together with text and icons displayed on the image display 22 (shown also in FIG. 4C), forms the camera graphical user interface (GUI). This GUI is controlled by the user interface portion of the firmware stored in the Flash EPROM 28. The digital camera 10 can also include a digital-to-analog (D/A) converter 27 and a miniature speaker 29 (also shown in FIG. 4C) which makes audible sounds when a new picture is taken, or when the user changes modes or advances to review the next stored image. The digital camera 10 can also include a video output driver 23 which connects to a TV display 31, such as an NTSC format home television, for displaying the captured images on the TV display 31. The digital camera 10 further includes a strobe flash unit (not shown) for illuminating the subject when the ambient illumination level is low.

After a series of images has been taken by the digital camera 10 and stored on the removable memory card 30, the removable memory card 30 can be inserted into a memory card reader 48 in the host computer 40. Alternatively, an interface cable 36 can be used to connect between a host interface 26 in the digital camera 10 and a camera interface 46 in the host computer 40. The interface cable 36 may conform to, for example, the well-know universal serial bus (USB) interface specification.

The captured images from the digital camera 10 can be downloaded to the host computer 40 and stored on a hard drive 56 under the control of a central processing unit (CPU) 50. The CPU 50 is coupled to a display monitor 52, which is used to view the images, and a keyboard 54. A mouse 55 permits the user to readily communicate with the CPU 50. The CPU 50 communicates with a local printer 58, such as an Epson Stylus Photo 700 printer, which produces hard copy prints of the images captured by the digital camera 10.

The digital camera 10 that is supplied to a user includes firmware stored in the Flash EPROM 28 which provides normal camera features. Users can customize the look and feel, and the functions offered by the digital camera 10, using the camera customization software provided with the digital camera 10. This camera customization software is provided on the CD-ROM disc 32, which is

loaded into the host computer 40 via the CD-ROM drive 42, or provided on the floppy disk 34, which is loaded into the host computer 40 via the floppy disk drive 44. The CD-ROM disc 32 or the floppy disk 34 can also include digital image application software, such as the Picture Easy™ version 3.1 software developed by the Eastman Kodak Company. Alternatively, all of the camera customization software could be downloaded from the Network Service Provider 70 via a modem 60. The modem 60 communicates with a modem 72 at the Network Service Provider 70, which is connected to a computer 74, a camera firmware database 76, and a billing system 78 which can charge the user (e.g., via a credit card) for downloading the camera customization software.

The CPU 50 uses the camera customization software in accordance with the present invention to provide custom firmware code which is downloaded under the control of processor 18 of the digital camera 10 via the removable memory card 30, and stored in the Flash EPROM 28, as described in commonly-assigned U.S. Patent No. 5,477,264, entitled "Electronic Imaging System Using a Removable Software-Enhanced Storage Device" to Sarbadhikari et al., or via the interface cable 36 as described in commonly-assigned U.S. Patent No. 5,734,425, entitled "Electronic Still Camera With Replaceable Digital Processing Program" to Takizawa et al., the disclosures of which are herein incorporated by reference.

The process of storing firmware code in an EPROM and of erasing firmware code from an EPROM is well known in the art, and need not be discussed in detail.

FIG. 2 is a flow diagram depicting the steps used in customizing the digital camera 10 of FIG. 1 in accordance with a preferred embodiment of the present invention. As shown in FIG. 2, when the CD-ROM disc 32 provided with the digital camera 10 is inserted into the CD-ROM drive 42, the camera customization software is automatically launched (block 100) and executed by the CPU 50. The user is informed, via the display monitor 52, of the user's ability to enhance the capability of his/her newly purchased digital camera 10 and asked if the user wishes to do so at the present time (block 110). If the user responds "yes" (block 120), the user is asked to connect his/her digital camera 10 to the host computer 40 via the interface cable 36 (block 125). In block 130, the camera

customization software then determines the capabilities of the digital camera 10 and an inventory of the features currently provided by the Flash EPROM 28. The capabilities of the digital camera 10 can be determined either by determining the camera model number or by determining the types of hardware features that the digital camera 10 can support and by the size of the memory of the Flash EPROM 28.

In block 140, the camera customization software determines which feature firmware components are available for this particular model camera via the software provided on the CD-ROM disc 32. In block 150, the camera customization software uses the modem 60 to determine whether the firmware components which provide the new features not stored on the CD-ROM disc 32 are available within the camera firmware database 76 at the Network Service Provider 70. The response from the Network Service Provider 70, received by the host computer 40, might include some firmware components that are available to the user at no charge, and other firmware components for which the user will be charged. In addition, the Network Service Provider 70 can track whether the user has previously purchased firmware components so that they can be downloaded again at no charge if the firmware component was lost by the user, or is otherwise unavailable. Further, the Network Service Provider 70 could offer discounts to the user based on previous purchases.

In block 160, the features provided by the available firmware components are displayed to the user on the display monitor 52 through an on-screen listing of these features. An example screen 53 listing available features is shown in FIG. 3. The screen 53 lists the available camera firmware memory in a window 305, and the features that the user can select in a product option window 310. A scroll bar 312 having an up arrow 314 and a down arrow 316 permits the user to scroll through a long list of available options. The product option window 310 also lists the amount of camera firmware memory needed to store the firmware component that provides the option, and the cost of the option.

To consider a particular option, the user clicks on a particular option line in the product option window 310, for example, the "Beastly

Vampires" line 318, which highlights this line in the product option window 310, for example, by making the text bolder than the other lines, or changing the color of this line. A description window 340 provides a brief description of the option. In this example, the option is a package of features designed for the Halloween season that includes the ability to add custom borders and special digital picture overlays with a Halloween theme. It includes two different vampire border templates, and the ability to selectively paint "blood" on pictures of faces captured by the digital camera 10. If this component is selected by the user in block 180, the appropriate firmware will be added to the Flash EPROM memory 28 of the digital camera 10 in block 210 to control the processor 18 to enable the user, via the camera user interface 24, to selectively add the vampire border templates to specific images and to paint "blood drops" in appropriate areas of the images they have captured using the digital camera 10, as the image is displayed on the color image display 22.

15           The product option window 310 can display many different types of optional features and functions, which will be described later. Some of these are listed in the product option window 310 shown in FIG. 3. The options include a "compression adjust" feature which provides compression algorithm settings appropriate for taking pictures of documents, rather than of real-world scenes.

20           The options also include a "red-eye elimination" option that eliminates red-eye pictures due to night flash. This option can be a flash add-on, meaning it adds a camera pre-flash mode to reduce the subject's pupil diameter or alternatively, can digitally process the captured picture using the processor 18 to identify and eliminate red-eye.

25           The options also include an "album" option that enables the user to upload, from the host computer 40 to the digital camera 10, particularly memorable personal images from various sources that are stored in the Flash EPROM memory 28, and for display on the color image display 22 or the TV display 31. These "album" images are compressed and stored as appropriate resolution images, typically having a greatly reduced number of pixels (and therefore a much smaller file size) than the images captured by the digital

30

camera 10 and stored in the removable memory 30.

The options further include a web-page generator that automatically generates an html file using the captured images, as well as one or more of the stored album images. This feature may be customized by the user as part of the process depicted in FIG. 2 to produce a web page that has a customized background color or image, customized header text, customized image date format or titles, and customized image sizes.

In block 170 of FIG. 2, the user can select a demo of one or more features that he or she would like to see demonstrated. For example, in FIG. 3, after selecting the "Beastly Vampires" feature by clicking on line 318, the user can select the "demo" button 322. When a particular feature (e.g., the beastly vampires special package) is selected for demonstration, the demonstration software is provided from the same location which provides the corresponding firmware component (e.g., the CD-ROM 32 or Network Service Provider 70) in the form of a QuickTime movie, Macromedia director presentation, or another multi-media presentation that provides more information on the use and value of the particular feature. To return to the display depicted in FIG. 3, the user selects a "view" selector 320.

In block 180, the user selects the feature(s) that the user wants to be included in his/her digital camera 10. This is done by highlighting the desired options in the product option window 310 and then chooses a "select" selector 342. The user can start with a previous camera selection by selecting a "restore" selector 332, which permits the user to select and restore a camera feature set that was previously backed up, and use that as the starting point for a new feature set.

When one or more features must be purchased from the Network Service Provider 70, the purchaser selects a "purchase" selector 324 which provides a series of order menus (e.g., HTML web pages) generated by the Network Service Provider 70 and communicated to the computer 40 via the modem 60. The user pays for the firmware component(s) corresponding to the selected feature(s) by providing a payment identifier into a secured electronic

commerce link which specifies a particular account which is to be charged or debited. The payment identifier can be a credit card number that specifies a particular credit card account. As used in this specification, a credit card will also include a debit card. The number of features that can be selected depends on the size of the firmware component(s) needed to implement the features, and the size of the firmware memory in the camera's Flash EPROM 28.

In block 190, the user is provided with the ability to select one of a plurality of icon schemes for the camera Graphical User Interface (GUI) 25 displayed on the color image display 22 of the digital camera 10, shown in FIG. 4C. This selection occurs after the user selects a "next" selector 344 shown in FIG. 3. Two different exemplary types of icon schemes are shown in FIGS. 4A and 4B. The icon schemes can use different colors, text fonts, icon styles (e.g., classic, whimsical, business), and background colors or patterns. The icon schemes can also include themes, such as a "Winnie the Pooh" or a "Pokemon" theme for a child, or an "X-files" or particular football team (e.g., the Green Bay Packers) theme for an adult, and the appropriate set of icons, having the appropriate text style, colors, and backgrounds will be used. Icons are provided for both the review mode features, enabled when the capture/review mode switch 86 (shown in FIG. 4C) is set in the review position, and for capture mode features, enabled when the capture/review mode switch 86 is set in the capture position.

FIGS. 4A and 4B demonstrate two different graphic user interface (GUI) screens that can be displayed on the image display 22 of the digital camera 10. Each GUI screen displays a main image 240 and provides the same basic camera functions through a scrollable list of icons 250. The first icon 252A (shown in FIG. 4A) or 252B (shown in FIG. 4B) depict different types of magnifying glasses. Selecting this icon 252A or 252B enables the user to magnify the image on the image display 22, i.e., to rescale the image to show the center portion of the image at a larger size. Both icons 252A and 252B control the same function, but have a different appearance on the image display 22 to appeal to different types of users. The second icon 254A (shown in FIG. 4A) or 254B

(shown in FIG. 4B) depict different styles of trash cans which enable the user to delete the selected picture. The third icon 256A (shown in FIG. 4A) or 256B (shown in FIG. 4B) enables the user to lock the image so that it cannot be inadvertently deleted by the user. The fourth icon 258A (shown in FIG. 4A) or 258B (shown in FIG. 4B) depict different styles of arrows which enable the user to scroll down to view additional icons which provide additional functions. The ability to scroll through this list of features provides the user the ability to view either a large or small number of camera functions. The length of this list of icons is modified as additional functions are added to or taken out of the camera firmware.

A representation of a film strip 260 at the bottom of the GUI screens including three small images (i.e., thumbnails), and a memory bar 262 is shown in FIGS. 4A and 4B. These enable the user to easily scroll through and review the images that are stored on the removable memory card 30 of the digital camera 10. An image number 264 is shown in the upper right portion of each GUI screen. FIG. 4B shows two additional icons 266 and 268 at the top of the GUI screen which represent features that are enabled for the current image. In the GUI screen of FIG. 4B, the presence of icon 266 indicates that the date is overlaid on the picture and the presence of icon 268 indicates that the image is locked so that it cannot be deleted. Note that FIG. 4A does not display icons 266 and 268 to provide a less informational screen design. Because the user can select an appropriate GUI for his/her digital camera 10, the digital camera 10 displays only that information critical to the user.

In block 200 of FIG. 2, the user is provided the ability to configure the layout of the camera GUI 25 for the selected camera feature(s). Certain features, such as adding or deleting flash modes (e.g., fill flash, red-eye reduction mode, auto mode) have preferred locations in the camera GUI 25 displayed on the color image display 22. Other features, such as the ability to group images into different albums, may not have predefined places in the camera GUI 25. To configure the camera GUI 25, the CPU 50 controls the display monitor 52 to provide the display shown in FIG. 5. As the user enters this phase of the process,

the user is given the option of automatically configuring these objects into the camera GUI 25 by selecting an "auto configure" selector 352, or by dragging and dropping icons to a simulation window 300 of the image display 22 of the camera GUI 25 of the desired final camera 10. This simulation window 300 includes a series of icons 362, 364, and 366 that the user can "drag and drop" in order to set their preferred icon order for the camera GUI 25 to be displayed on the color image display 22 of the digital camera 10 (shown in FIG. 1). A scroll bar 372 having an up arrow 374 and a down arrow 376 enables the user to scroll through the icons 362, 364, and 366. The user arranges the icons 362, 364 and 366 displayed in the simulation window 300 that are used for the review mode by first selecting a "review" button 380, and then arranges another set of icons (not shown) that are displayed in the simulation window 300 for the capture mode by selecting a "capture" button 382.

Note that by selecting the "view" selector 320 shown in FIG. 5, the user can return to an earlier step in the process (e.g., block 160 of FIG. 2) if he or she wants to review other features. The user can also demo the various firmware-enabled camera options by selecting the product in a product window 360, and then selecting the "demo" selector 322. The user also has some other options. For example, the user can backup the customized camera firmware to be stored in the Flash EPROM 28 to a file on the host computer 40 by selecting a "backup" selector 350, or restore an earlier configuration from a file on the host computer 40 to override the current configuration by selecting a "restore" selector 354.

FIG. 5 also includes an "install" selector 330. In block 210 of FIG. 2, this instructs the camera customization software to configure the firmware components and upload them to the firmware stored in the Flash EPROM 28 in the digital camera 10 in order to customize the camera features and the camera user interface 24. This can be done by first erasing some of the firmware installed in Flash EPROM 28, and then uploading the new firmware components. Alternatively, the camera customization software provided on the CD-ROM 32 or the Floppy disk 34 can include camera source code that must be compiled by a firmware compiler (not shown) designed to produce firmware capable of being



executed by the processor 18, before being downloaded to the digital camera 10. In this situation, the camera customization software also includes the necessary compiler software, which is executed when the user selects a "build camera" selector 356 shown on the screen 53 in FIG. 5 which is displayed on the display monitor 52 shown in FIG. 1. This enables the camera firmware to be "built" (e.g., compiled) to create a firmware component that provides all of the user selected features. After this firmware component has been created by the compiler, the "install" selector 330 is used to initiate the downloading of the compiled firmware component to the digital camera 10. If the user is unhappy with the features provided by the newly installed firmware, the user can re-install an older firmware component by using the "restore" selector 354 followed by the "install" selector 330.

FIG. 6 is a flow chart depicting the steps of another embodiment of the present invention. In this embodiment, the camera customization software can, in accordance with the responses provided by the user to a series of questions provided as part of the camera customization software, selectively enable or remove various firmware from the digital camera 10, to customize the digital imaging system so that the digital camera 10 provides only those features that are of interest to the user.

The additional steps shown in the flow chart of FIG. 6 can be inserted between blocks 150 and 160 of the flow chart in FIG. 2, and provide an alternative to blocks 160 through 200 of FIG. 2. Block 162 in FIG. 6 follows block 150 of FIG. 2. In blocks 162 through 172 of FIG. 6, the user answers a number of questions displayed on the display monitor 52 using the keyboard 54 or the mouse 55. FIG. 7 depicts an example of an interface screen, displayed on the display monitor 52, for entering the answers to these questions using groups of "radio buttons" 418, 428, 430, 440, and 450.

In block 162 of FIG. 6, by clicking one of the radio buttons 418, the user selects a camera GUI style from a group of possible style choices 410, for example, a classic style 412, a whimsical style 414, and a business style 416 (shown in FIG. 7). In the example shown in FIG. 7, the user has selected the

business style 416.

In block 164 of FIG. 6, by clicking one of the radio buttons 428, the user selects a camera GUI color set from a group of possible color sets choices 420, for example, a white / blue / red color set 422, a gray / mauve / violet color set 424, or a gray / blue / pink color set 426. In the example shown in FIG. 7, the user has selected the gray / mauve / violet color set 424.

In block 166 of FIG. 6, by clicking the appropriate radio buttons 430, the user enters his or her experience levels for using digital cameras, traditional cameras, and computers. In the example shown in FIG. 7, the user has indicated that he or she has seldom used a digital camera or film camera, but is an experienced computer user.

In block 168 of FIG. 6, by clicking the appropriate radio buttons 440, the user enters his or her picture taking preferences. This provides information on the types of pictures the user expects to take quite often, and those the user does not expect to take very often. In the example shown in FIG. 7, the user has indicated that he or she expects to "often" take portraits of faces and close-up equipment, "sometimes" take pictures of groups of people, "seldom" take pictures of far-away scenery, and never take pictures of fast-moving sports.

In block 172 of FIG. 6, by clicking the appropriate radio buttons 450, the user enters his or her expectations of how the user will use the pictures he or she plans to take with the digital camera 10. In the example shown in FIG. 7, the user has indicated that he or she expects to "often" use his or her pictures for web pages, "sometimes" use his or her pictures for electronic documents, "seldom" use his or her pictures for color photo prints, and "never" use his or her camera for photo enlargements.

In block 174 of FIG. 6, the camera customization software executed by the CPU 50 classifies the user in an appropriate category based on the user responses in blocks 162 through 172. For example, the answers provided in the example shown in FIG. 7 indicate a business user who is not familiar with photography but is very familiar with computers. Furthermore, the user is interested primarily in taking pictures of faces and close-up objects for use in

creating web pages and electronic documents.

In block 176 of FIG. 6, the camera customization software executed by the CPU 50 determines the appropriate camera features for the user class determined in block 174 and creates an appropriate camera GUI 25 to enable the user to access these features. In the example shown in FIG. 7, the ability to store many relatively low resolution images in the digital camera 10, and special modes for portraits and close-up photography, would be emphasized by including the appropriate firmware components and organizing the camera GUI 25 to make these features most prominent, so they could be easily accessed by the user when using the digital camera 10. In addition, a firmware component that automatically arranges the digital pictures in a web page could be included, since the user often wishes to use his or her pictures for web pages. Camera features that are not appropriate for this class of user would not be included. For example, firmware components that provide a fast moving "sports photography" mode, or enable a direct connection between the digital camera 10 and a home printer 58 via the host interface 36, to print images without using the host computer 40, would not be included, since the user has little interest in these features.

In block 178 of FIG. 6, the customized camera GUI 25 and features are displayed to the user, for example, using the screen 53 depicted in FIG. 5, which is displayed on the display monitor 52 of FIG. 1. The screen 53 includes a simulation window 300 of the color image display 22 of the camera GUI 25 of the digital camera 10.

In block 182, the user can approve the GUI and features, for example, by selecting the "install" selector 330. In this case, block 210 of FIG 2 is then completed in order to install the customized firmware in the digital camera 10. Alternatively, in block 182, if the user does not approve of some aspects of the GUI and features, the user can then modify the GUI or features by demonstrating and selecting alternative features, icon styles, or GUI arrangements using blocks 160 through 200 of FIG. 2.

Therefore, the process depicted in the flow chart of FIG. 6 in accordance with the present invention enables the camera customization software

executed by the CPU 50 to create a customized camera GUI 25 for a particular user. The camera customization software can provide a “novice user” with a very simple set of features by “hiding” the advanced features. In addition, the camera customization software can enable the user to select the output size of the image, as well as the type of output (e.g., a web page, 4x6 inch inkjet color photo print, or an 8x12 inch thermal print photo enlargement), and have the digital camera 10 automatically select the resolution and compression settings. The camera customization software can also enable the user to select particular “photo situations” (e.g., portrait printing, web page creation), and have the digital camera 10 automatically set many camera parameters including, for example, the color matrix values and the amount of sharpening, rather than have the user deal with many complex controls.

The camera customization software executed by the CPU 50 can provide the user with the ability to select from many different features that may be provided by the firmware executed by the processor 18 in the digital camera 10. In addition to the previously described features, additional features can include:

Configuring the firmware stored in the Flash EPROM 28 in the digital camera 10 to add firmware components which provide special effects features, such as posterization or “coloring book” creative effects, monochrome or septia effects, and special effects filters (e.g., star, defocus corners);

Configuring the firmware stored in the Flash EPROM 28 in the digital camera 10 to enable the user to upload, from the host computer 40 to the digital camera 10, particularly memorable personal images for sharing with others via the color image display 22 of the digital camera 10;

Configuring the firmware stored in the Flash EPROM 28 in the digital camera 10 to add a “slide show” capability to the digital camera 10 for automatically reviewing the image on an LCD or video display, for a selected period (e.g., five seconds per image) including “transition” effects (e.g., fades or pulls) from one image to the next;

Configuring the firmware stored in the Flash EPROM 28 in the digital camera 10 to add unique sounds to the camera user interface 24, such as, for example, funny noises as pictures are taken;

- 5 Configuring the firmware stored in the Flash EPROM 28 in the digital camera 10 to support various image resolution or compression levels, compression algorithms, or image file formats, or to provide the ability to modify captured images as they are processed, such as by digital zooming and cropping, tone or color adjustments, or sharpness adjustments;

- 10 Configuring the firmware stored in the Flash EPROM 28 in the digital camera 10 to provide red-eye removal, as described in commonly assigned U.S. Patent Application Serial No. 09/290,290, filed April 13, 1999 (docket 77,739) to Fredlund, the disclosure of which is herein incorporated by reference;

- 15 Configuring the firmware components stored in the Flash EPROM 28 in the digital camera 10 to provide the ability to select one or more border templates that may be combined with newly captured digital images, as described in commonly assigned U.S. Patent No. 5,477,264 to Sarbadhikari et al., the disclosure of which is herein incorporated by reference;

- 20 Configuring the firmware components stored in the Flash EPROM 28 in the digital camera 10 to group images into various categories or folders, as described in commonly assigned U.S. Patent No. 5,633,678 to Kenneth Parulski, the disclosure of which is herein incorporated by reference;

- 25 Configuring the firmware components stored in the Flash EPROM 28 in the digital camera 10 to provide the ability to stitch multiple images together to produce panoramic images, such as by using the method described in commonly assigned U.S. Patent Application Serial No. 09/224,547, filed December 31, 1998 (docket 77,751) to Parulski, the disclosure of which is herein incorporated by reference;

- 30 Configuring the firmware components stored in the Flash EPROM 28 in the digital camera 10 to provide print ordering from the camera, as described in commonly-assigned U.S. Patent Application Serial No. 08/977,382,

filed November 24, 1997 (docket 75,276) to Parulski, the disclosure of which is herein incorporated by reference;

Configuring the firmware components stored in the Flash EPROM 28 in the digital camera 10 to composite multiple images together, for example, using the method and apparatus described in commonly-assigned U.S. Patent No. 5,914,748 to Parulski, the disclosure of which is herein incorporated by reference;

Configuring the firmware components stored in the Flash EPROM 28 in the digital camera 10 to create html files to arrange the images into a web page that has a customized background color, header text, image date/titles, and image size; and

Configuring the firmware components stored in the Flash EPROM 28 in the digital camera 10 to provide the ability to e-mail images from the digital camera 10, for example, as described in commonly-assigned U.S. Patent Application Serial No. 09/004,046, filed January 7, 1998 (docket 75,275) to Ward, the disclosure of which is herein incorporated by reference.

Depending on the features selected, the user must provide appropriate personalization information that will later be incorporated into the customized digital camera 10. Such personalization information can include personal digital data, for example, ASCII text providing the name, mailing address, phone number, or e-mail address of the user. The personalization information can also include names of people or events to be used to categorize images, and an address book of e-mail addresses to be displayed on the color image display 22. The personalization information can also include one or more border templates selected by the user.

In an alternative embodiment, the camera customization software is uploaded to the digital camera 10 by storing the camera customization software on the removable memory card 30 using the memory card reader 48, inserting the removable memory card 30 into memory card interface 20 of the digital camera 10, and uploading the camera customization software from the removable memory card 30 to the Flash EPROM 28 as described in commonly-assigned U.S.

Patent No. 5,477,264, entitled "Electronic Imaging System Using a Removable Software-Enhanced Storage Device" to Sarbadhikari et al., the disclosure of which is herein incorporated by reference.

In another alternative embodiment, the firmware memory is provided as a Read Only Memory (ROM) that stores firmware which implements a plurality of different camera features. The digital camera 10 also includes a programmable memory (not shown) which stores camera settings. The processor 18 uses the stored camera settings to determine which camera features to implement, from the plurality of camera features provided by the firmware. In this embodiment, the camera customization software displays the selectable camera features to the user. The user selects desired features, and the camera customization software determines the associated camera setting(s). The settings are then communicated to the digital camera 10 using the host interface 36 or the removable memory card 30, and are then stored in the camera programmable memory.

In another alternative embodiment, the camera customization software provides the user with sets of digital images, for example, three images at a time, and asks the user to choose which of the three images is preferred out of each set. The images have noticeable differences in flesh tones, sharpness, contrast, and other image attributes. Based on the user's choices, the camera customization software customizes the firmware in the Flash EPROM 28 to provide the type of images preferred by the user. For example, a first user may prefer more vibrant colors, and sharper, more contrasty images. A second user may prefer softer looking images. Based on the user's selections, the edge enhancement setting, color correction matrix, and tone correction lookup tables may be modified. Alternatively, the digital camera can include a programmable memory (not shown) which stores the camera settings. For example, the programmable memory can store one or more edge enhancement settings, color correction settings, and/or tone correction settings. When the user selects a preferred image, the camera customization software determines the associated camera setting(s), and the programmable memory stores the associated camera

setting(s). In this embodiment, the camera customization software can be executed external to the digital camera 10 (e.g., by the CPU 50 of FIG. 1), or alternatively, can be executed by the processor 18 in the digital camera 10. In the latter case, the sets of digital images are displayed on the image display 22 of the digital camera 10 so that the camera customization process can be performed using only the digital camera 10 without the use of the host computer 40.

In another embodiment, the customization is done in a retail establishment which sells the digital camera 10. The camera firmware stored in the Flash EPROM 28 is customized at the time of purchase, either by a clerk operating a computer and selecting features at the request of the user, or by a customer-operated kiosk. In this embodiment, it is possible for the firmware to selectively limit camera features, such as by modifying the control program used for the zoom lens 12 in order to limit the zoom range (e.g., to provide only a 2:1 or a fixed focal length lens rather than the 3:1 normal zoom range) at a lower price, or to disable other features.

In another embodiment, the camera customization software permits two or more different users to customize the feature set and GUI 25 of the digital camera 10 and to store the corresponding firmware components or firmware settings in the Flash EPROM 28. When the digital camera 10 is powered on, a list of users is displayed on the image display 22 and the user selects their name using the camera user interface 24. In response to this user input, the processor 18 uses the appropriate firmware components or firmware settings stored in the Flash EPROM 28 to provide the customized camera GUI and feature set for that particular user. Alternatively, when the digital camera 10 is powered on, the settings for the last user can be employed, and a camera preferences menu can be used to select a different user.

FIG. 8 is a flow diagram depicting image processing operations that can be performed by the processor 18 in the digital camera 10 in order to process the images from the image sensor 14 provided by the A/D converter 16. The processing performed by the digital camera 10 to process a particular image is determined by user settings, for example, User A settings 580 or User B



settings 582, shown in FIG. 8. The User A settings 580 include a resolution setting 514, a color correction setting 524, a tone correction setting 534, a sharpness setting 544, and a compression setting 554. The User B settings 582 include a resolution setting 516, a color correction setting 526, a tone correction setting 536, a sharpness setting 546, and a compression setting 556.

The Bayer pattern color filter array data (block 500) which has been digitally converted by the A/D converter 16 is interpolated in block 510 to provide red, green and blue (RGB) image data values at each pixel location. The color filter array interpolation in block 510 can use the luminance CFA interpolation method described in commonly-assigned U.S. Patent No. 5,652,621, entitled "Adaptive color plane interpolation in single sensor color electronic camera" to Adams et. al., the disclosure of which is herein incorporated by reference. The color filter array interpolation in block 510 can also use the chrominance CFA interpolation method described in commonly-assigned U.S. Patent No. 4,642,678, entitled "Signal processing method and apparatus for producing interpolated chrominance values in a sampled color image signal", to Cok, the disclosure of which is herein incorporated by reference.

To provide multiple resolution images, for example, a full resolution image and a reduced resolution image, the color filter array interpolation in block 510 can use the method described in commonly-assigned U.S. Patent No. 5,493,335, entitled "Single sensor color camera with user selectable image record size", to Parulski et. al., the disclosure of which is herein incorporated by reference. The resolution mode provided in block 512 is either the full or reduced resolution, corresponding to the current user setting, which can be either User A resolution setting 514 or User B resolution setting 516 shown in FIG. 8.

The RGB image data is color corrected in block 520 using, for example, the 3x3 linear space color correction matrix 20 depicted in FIG. 3 of commonly-assigned U.S. Patent No. 5,189,511, entitled "Method and apparatus for improving the color rendition of hardcopy images from electronic cameras" to Parulski et. al., the disclosure of which is incorporated herein by reference. The

color correction matrix co-efficients which are stored in the flash EPROM 28 in the digital camera 10 can include the following:

Setting 1 (normal color reproduction)

5

$$\begin{aligned} R_{out} &= 1.50 R_{in} - 0.30 G_{in} - 0.20 B_{in} \\ G_{out} &= -0.40 R_{in} + 1.80 G_{in} - 0.40 B_{in} \\ B_{out} &= -0.20 R_{in} - 0.20 G_{in} + 1.40 B_{in} \end{aligned}$$

10 Setting 2 (saturated color reproduction)

$$\begin{aligned} R_{out} &= 2.00 R_{in} - 0.60 G_{in} - 0.40 B_{in} \\ G_{out} &= -0.80 R_{in} + 2.60 G_{in} - 0.80 B_{in} \\ B_{out} &= -0.40 R_{in} - 0.40 G_{in} + 1.80 B_{in} \end{aligned}$$

15

Setting 3 (desaturated color reproduction)

$$\begin{aligned} R_{out} &= 1.25 R_{in} - 0.15 G_{in} - 0.10 B_{in} \\ G_{out} &= -0.20 R_{in} + 1.40 G_{in} - 0.20 B_{in} \\ B_{out} &= -0.10 R_{in} - 0.10 G_{in} + 1.20 B_{in} \end{aligned}$$

20

Setting 4 (monochrome)

$$\begin{aligned} R_{out} &= 0.30 R_{in} + 0.60 G_{in} + 0.10 B_{in} \\ G_{out} &= 0.30 R_{in} + 0.60 G_{in} + 0.10 B_{in} \\ B_{out} &= 0.30 R_{in} + 0.60 G_{in} + 0.10 B_{in} \end{aligned}$$

25

The color matrix co-efficients provided in block 522 include the four settings listed above. The co-efficients used in color correction block 520 for a particular picture are determined by the current user setting, which can be either the User A color correction setting 524 or the User B color correction setting 526. For example, User A may have selected Setting 1 (normal color reproduction) and User B may have selected Setting 4 (monochrome). Therefore, Setting 1 is used if User A is the current user of the digital camera 10, and Setting 4 is used if User B is the current user of the digital camera 10.

35

The color corrected image data is tone corrected in block 530. This tone correction 530 can use, for example, the lookup table corresponding to FIG. 2 of U.S. Patent No. 5,189,511 cited above. In the present invention, a plurality of tone correction lookup tables is provided in block 532. These can include lookup

tables corresponding to the three curves depicted in FIG. 9, which include a "normal" tone correction curve 600, a "high contrast" tone correction curve 602, and a "low contrast" tone correction curve 604. These three lookup tables are stored in the flash EPROM 28 in the digital camera 10.

5           The tone correction lookup table used in tone correction block 530 for a particular image is determined by the current user setting, which can be either the User A tone correction setting 534 or the User B tone correction setting 536.

10           The image sharpening provided in block 540 of FIG. 8 can utilize the method described in commonly-assigned U.S. Patent No. 4,962,419 ('419 patent), entitled "Detail processing method and apparatus providing uniform processing of horizontal and vertical detail components" to Hibbard et. al., the disclosure of which is incorporated herein by reference. In the present invention, the coring lookup table depicted in FIG. 4 of the '419 patent is selected from a plurality of coring lookup tables that correspond to the curves depicted in FIG. 10.

15           These lookup tables include a "normal" sharpening level curve 610, an "extra sharp" curve 612, and a "less sharp" curve 608. These three lookup tables are stored in the flash EPROM 28 in the digital camera 10.

            The coring lookup tables provided in block 542 of FIG. 8 include tables corresponding to the three curves 610, 612, and 614 depicted in FIG. 10.

20           The lookup table used in image sharpening block 540 for a particular image is determined by the current user setting, which can be either the User A sharpness setting 544 or the User B sharpness setting 546.

            The image compression provided in block 550 of FIG. 8 can use the method described in commonly-assigned U.S. Patent No. 4,774,574 (the '574 patent), entitled "Adaptive block transform image coding method and apparatus" to Daly et. al., the disclosure of which is incorporated herein by reference. The compression quantization tables provided in block 552 include a plurality of quantization tables, for example, three different tables, for the quantize block 26 in FIG. 1 of the '574 patent. These tables provide different quality levels and average

25           file sizes for the compressed image file 560 provided to the removable memory card 30 by the digital camera 10. These three quantization tables are stored in the

30

flash EPROM 28 in the digital camera 10.

The quantization table used in image compression block 550 of FIG. 8 for a particular image is determined by the current user setting, which can be either by the User A compression setting 554 or the User B compression setting 556 shown in FIG. 8.

The User A settings 580 and the User B settings 582 shown in FIG. 8 can be determined as part of the camera customization process depicted in FIG. 2. In this case, the settings 580 and 582 are downloaded from the host computer 40 to the digital camera 10. As described earlier, the settings 580 and 582 are used to select particular matrix coefficients (block 522), tone correction lookup tables (block 532), coring lookup tables (block 542), and compression quantization tables (block 552) stored in the flash EPROM 28 of the digital camera 10 (shown in FIG. 1). Alternatively, the matrix coefficients (block 522), tone correction lookup tables (block 532), coring lookup tables (block 542), and compression quantization tables (block 552) can be stored in a ROM (not shown), and only the camera settings 580 and 582 can be stored in a reprogrammable memory, such as the flash EPROM 28. As another alternative, only the particular matrix coefficients (block 522), tone correction lookup tables (block 532), coring lookup tables (block 542), and compression quantization tables (block 552) selected by Users A and B can be downloaded from the host computer 40 to the digital camera 10 and stored in the flash EPROM 28. As yet another alternative, the user selection can be performed using the camera GUI 25. In this embodiment, the matrix coefficients (block 522), tone correction lookup tables (block 532), coring lookup tables (block 542), and compression quantization tables (block 552) are stored in the flash EPROM 28 or in the ROM (not shown), and the user settings 580 and 582 are stored in a reprogrammable memory, such as the flash EPROM 28.

Computer program products, such as readable storage medium, can be used to store the customization software, and also the desired firmware components in accordance with the present invention. The readable storage medium can be a magnetic storage media, such as a magnetic disk (such as a

floppy disk) or magnetic tape; optical storage media, such as an optical disk, an optical tape, or a machine readable bar code; solid state electronic storage devices, such as a random access memory (RAM) or a read only memory (ROM); or any other physical device or medium employed to store computer programs.

- 5           The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

# Parts List

10	digital camera
11	optical viewfinder
12	lens
13	zoom switch
14	image sensor
15	shutter button
16	analog-to-digital converter
18	processor
20	memory card interface
22	image display
23	video output driver
24	camera user interface
25	camera graphical user interface
26	host interface
27	digital-to-analog converter
28	Flash EPROM
29	miniature speaker
30	removable memory card
31	TV display
32	CD-ROM disc
34	Floppy disk
36	interface cable
40	host computer
42	CD-ROM drive
44	Floppy disk drive
46	interface
48	memory card reader
50	central processing unit
52	display monitor
53	screen

54	keyboard
55	mouse
56	hard drive
58	home printer
60	modem
70	Network Service Provider
72	modem
74	computer
76	camera firmware database
78	billing system
80	user button
81	user button
82	user button
83	user button
84	user button
86	capture/review mode switch
240	main image
250	list of icons
252A, 252B	first icon
254A, 254B	second icon
256A, 256B	third icon
258A, 258B	fourth icon
260	filmstrip
262	memory bar
264	image number
266	icon
268	icon
300	simulation window
305	window
310	product option window
312	scroll bar

- 314 up arrow
- 316 down arrow
- 318 “Beastly Vampires” line
- 320 “view” selector
- 322 “demo” selector
- 324 “purchase” selector
- 330 “install” selector
- 332 “restore features” selector
- 340 description window
- 342 “select” selector
- 344 “next” selector
- 350 “backup” selector
- 352 “auto configure” selector
- 354 “restore” selector
- 356 “build camera” selector
- 360 product window
- 362 icon
- 364 icon
- 366 icon
- 372 scroll bar
- 374 up arrow
- 376 down arrow
- 380 “review” button
- 382 “capture” button
- 410 style choices
- 412 classic style
- 414 whimsical style
- 416 business style
- 418 radio button
- 420 color set choices
- 422 white / blue / red color set



- 424 gray / mauve / violet color set
- 426 gray / blue / pink color set
- 428 radio button
- 430 radio button
- 440 radio button
- 450 radio button
- 514 resolution setting
- 516 resolution setting
- 524 User A color correction setting
- 526 User B color correction setting
- 534 User A tone correction setting
- 536 User B tone correction setting
- 544 User A sharpness setting
- 546 User B sharpness setting
- 554 User A compression setting
- 556 User B compression setting
- 580 User A settings
- 582 User B settings
- 600 “normal” tone correction curve
- 602 “high contrast” tone correction curve
- 604 “low contrast” tone correction curve
- 608 “less sharp” curve
- 610 “normal” sharpening level curve
- 612 “extra sharp” curve

**WHAT IS CLAIMED IS:**

1. A method for customizing a digital camera for at least one particular user by storing at least one firmware component in a programmable memory of the digital camera which controls the operation of the digital camera, the method comprising the steps of:

(a) providing customization software executed external to the digital camera which can access a plurality of firmware components providing different camera features;

(b) the user selecting at least one desired camera feature to cause the customization software to access the corresponding firmware component(s); and

(c) providing the selected corresponding firmware component(s) to the digital camera and reprogramming the programmable memory of the digital camera to store the corresponding firmware component(s) to thereby customize the digital camera.

2. The method according to claim 1 wherein step (c) includes erasing at least one undesired feature preexisting in the programmable memory of the digital camera.

3. The method according to claim 1 wherein step (c) includes adding at least one desired feature to the programmable memory of the digital camera.

4. The method according to claim 1 wherein the customization software is provided on a computer program product.

5. The method according to claim 1 wherein the camera customization software is provided by a Network Service Provider.

6. The method according to claim 1 wherein step (b) includes using a host computer to select the at least one desired camera feature.

7. The method according to claim 6 wherein the host computer is provided in a retail establishment.

8. The method according to claim 1 wherein the digital camera includes a removable memory card, and wherein the desired firmware component(s) are stored on the removable memory card.

9. The method according to claim 1 wherein the digital camera includes a camera graphical user interface responsive to firmware stored in the programmable memory, and wherein the firmware component(s) include configuring the camera graphical user interface to provide features selected from a plurality of possible background colors, icon types, icon orders, or icon locations.

10. The method according to claim 1 wherein the digital camera includes a camera graphical user interface, and wherein the camera graphical user interface is coupled to the stored firmware component(s) to provide the user with a menu from which the features that can be selected include a plurality of names, locations, or events.

11. The method of claim 1 wherein the digital camera further includes a processor, and wherein the firmware component(s) can be executed by the processor to control the operation of the digital camera.

12. A digital camera configured according to the method of claim 1.

13. At least one computer program product having the customization software stored thereon for performing the method according to claim 1.

14. The method of claim 1 wherein the desired camera features that can be selected by the user include particular sounds which the digital camera produces when images are captured or reviewed.

15. The method of claim 1 wherein the desired camera features that can be selected by the user include configuring the firmware component(s) to create one or more html files to arrange images captured by the customized digital camera into a web page having a customized background color, header text, image date, image titles, or image size.

16. The method of claim 1 wherein the desired camera features that can be selected by the user include monochrome or septia effects, and special effects filters.

17. The method of claim 1 wherein the digital camera includes a display, and wherein the desired camera features that can be selected by the user include enabling images to be uploaded from an external device and displayed on the display.

18. The method of claim 1 wherein the desired camera features that can be selected by the user include particular tone or color adjustments, or sharpness adjustments.

19. The method of claim 1 wherein the digital camera includes a display, and wherein the desired camera features that can be selected by the user include enabling a group of images to automatically be sequentially viewed on the display for a user specified period of time.

20. A method for customizing a digital camera for at least one particular user by storing at least one firmware component in a programmable memory of the digital camera which controls the operation of the digital camera, the method comprising the steps of:

- (a) providing customization software executed external to the digital camera which can access software code associated with a plurality of different camera features;
- (b) displaying a list of selectable camera features remote from the digital camera;
- (c) the user selecting at least one desired camera feature from the displayed list of camera features to cause the customization software to access the software code associated with the selected feature, and to provide a corresponding firmware component; and
- (d) providing the firmware component to the digital camera and reprogramming the programmable memory to store the firmware component to thereby customize the digital camera.

21. The method of claim 20 wherein the digital camera further includes a processor, and wherein the software code accessed by the customization software is source code, and the customization software compiles the source code to create the firmware component that can be executed by the processor.

22. A digital camera configured according to the method of claim 20.

23. At least one computer program product having the customization software stored thereon for performing the method according to claim 20.

24. The method of claim 20 wherein the desired camera

features that can be selected by the user include particular sounds which the digital camera produces when images are captured or reviewed.

25. The method of claim 20 wherein the desired camera features that can be selected by the user include configuring the firmware component(s) to create one or more html files to arrange images captured by the customized digital camera into a web page having a customized background color, header text, image date, image titles, or image size.

26. The method of claim 20 wherein the desired camera features that can be selected by the user include monochrome or sepia effects, and special effects filters.

27. The method of claim 20 wherein the digital camera includes a display, and wherein the desired camera features that can be selected by the user include enabling images to be uploaded from an external device and displayed on the display.

28. The method of claim 20 wherein the desired camera features that can be selected by the user include particular tone or color adjustments, or sharpness adjustments.

29. The method of claim 20 wherein the digital camera includes a display, and wherein the desired camera features that can be selected by the user include enabling a group of images to automatically be sequentially viewed on the display for a user specified period of time.

30. A method for providing customized firmware for a digital camera for at least one particular user, the customized firmware having at least one firmware component which controls the operation of the digital camera, the method comprising the steps of:

(a) providing customization software executed external to the digital camera which can access software code associated with a plurality of different camera features;

(b) displaying a list of the camera features remote from the digital camera;

(c) the user selecting at least one desired camera feature from the displayed list of camera features to cause the customization software to access the software code associated with the at least one selected feature, and to provide corresponding firmware component(s); and

(d) the user providing a payment identifier specifying an account to be debited to pay for the firmware component(s).

31. The method of claim 30 further including the step of providing the selected corresponding firmware component(s) to the digital camera and reprogramming a programmable memory of the digital camera to store the corresponding firmware component(s) to thereby customize the digital camera.

32. The method according to claim 30 wherein the account is a credit card account and the payment identifier is information provided from the credit card.

33. A digital camera configured according to the method of claim 31.

34. At least one computer program product having the customization software stored thereon for performing the method according to claim 30.

35. A method for customizing a digital camera for at least one particular user by storing camera settings in a programmable memory of the digital camera, the method comprising the steps of:

- (a) providing customization software executed external to the digital camera for displaying a plurality of selectable features that can be provided by the digital camera;
- (b) the user selecting desired camera features from the plurality of selectable features;
- (c) the customization software determining camera settings corresponding to the selected features; and
- (d) providing the camera settings to the digital camera and programming the programmable memory of the digital camera to store the camera settings to thereby customize the digital camera.

36. The method of claim 35 wherein the digital camera is customized to include different camera settings for at least two different users.

37. The method of claim 36 wherein the digital camera includes a customizable camera graphical user interface, and wherein the different camera settings provide different camera graphical user interfaces.

38. A digital camera configured according to the method of claim 35.

39. At least one computer program product having the customization software stored thereon for performing the method according to claim 35.

40. A method for customizing a digital camera for at least one particular user by storing at least one camera setting in a programmable memory of the digital camera which controls the operation of the digital camera, the method comprising the steps of:

- (a) providing customization software which can access software code associated with a plurality of different camera settings;



- (b) displaying a plurality of digital images provided by the software code corresponding to different camera settings;
- (c) the user choosing a desired digital image from the displayed digital images to cause the customization software to determine at least one associated camera setting; and
- (d) programming the programmable memory to store the at least one associated camera setting to thereby customize the digital camera.

41. The method of claim 40 wherein the at least one camera setting controls edge enhancement, color correction, or tone correction.

100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224  
2225  
2226  
2227  
2228  
2229  
2230  
2231  
2232  
2233  
2234  
2235  
2236  
2237  
2238  
2239  
2240  
2241  
2242  
2243  
2244  
2245  
2246  
2247  
2248  
2249  
2250  
2251  
2252  
2253  
2254  
2255  
2256  
2257  
2258  
2259  
2260  
2261  
2262  
2263  
2264  
2265  
2266  
2267  
2268  
2269  
2270  
2271  
2272

# ABSTRACT

A method for customizing a digital camera for at least one particular user is disclosed. The digital camera includes a reprogrammable memory for storing firmware which controls the operation of the digital camera and a camera graphical user interface responsive to the firmware stored in the reprogrammable memory. The method includes providing customization software executed external to the digital camera which can access a plurality of firmware components having different camera features. A user selects desired camera features to cause the customization software to access the corresponding firmware component(s). The selected corresponding firmware component(s) are provided to the digital camera and the reprogrammable memory is reprogrammed to store the corresponding firmware component(s) to thereby customize the digital camera.

FIG. 1


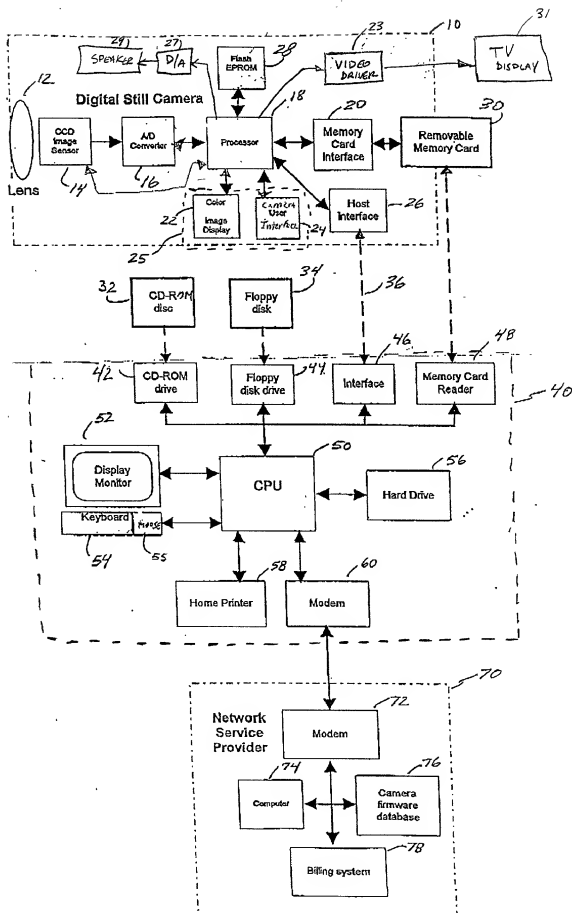


FIG. 2

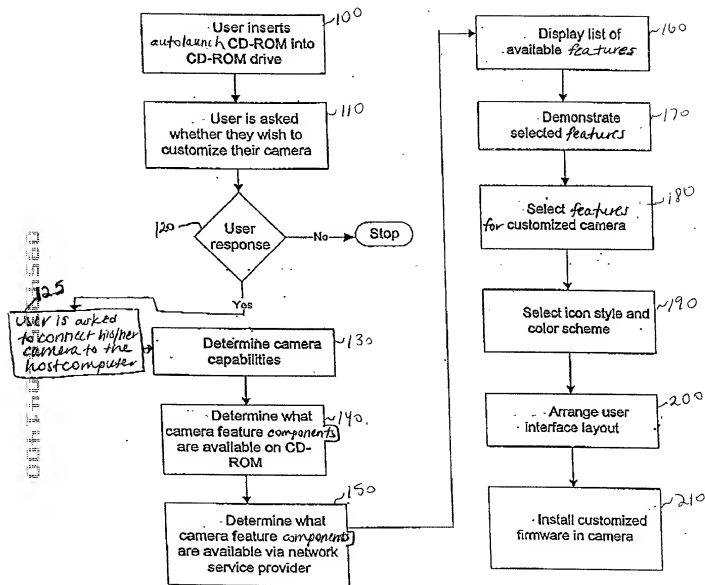

Select a product, select demo to get more information about the product or purchase to buy it.

Products	Cost	Memory
Beastly Vampire	\$15.00	350K
Compression Adjust	\$10.00	200K
Red Eye Elimination	\$1.50	100K
Album	\$5.00	400K
Web-Page Generator	\$12.00	500K

This special feature allows you to add Albums to your camera. Press 'demo' to see how they are used.

Available Camera Memory: 2100K

Next

Select

View

Demo

Purchase

Restore

FIG 4A



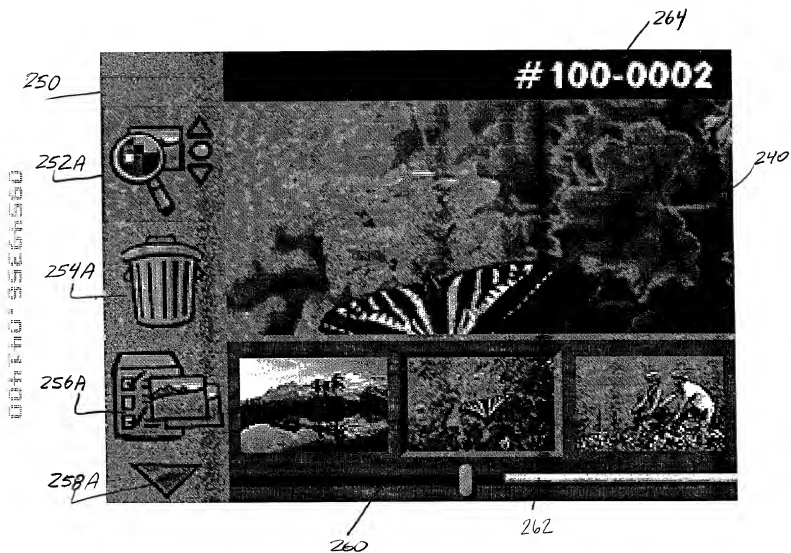


FIG 4B



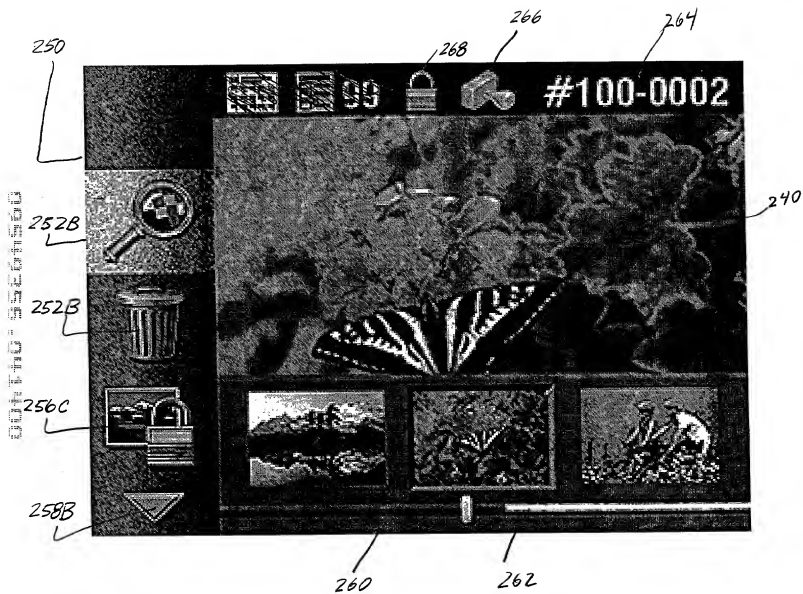

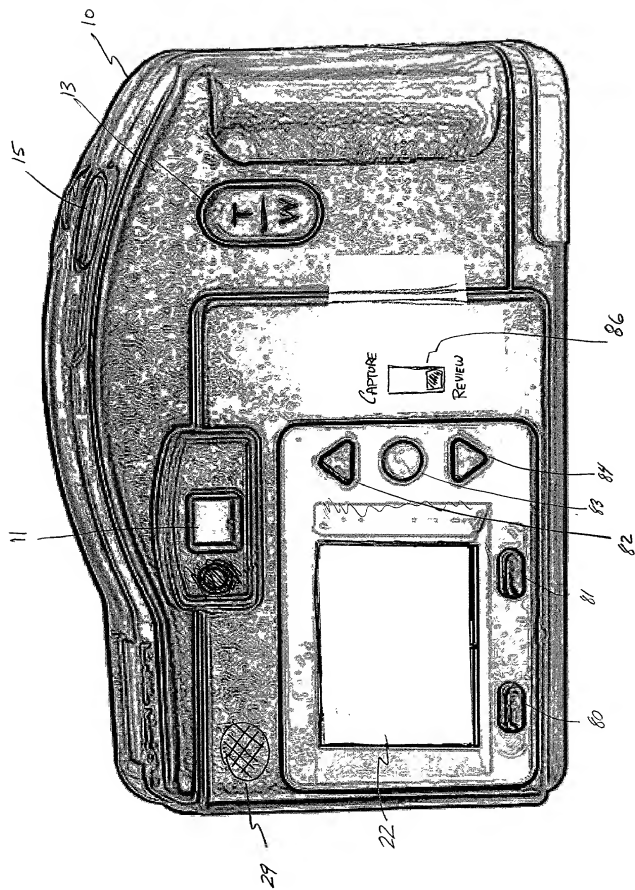

Press Auto Configure to automatically install your new modules.  
Drag products to the camera user interface to arrange them  
the way you want.

My New Products

Web Page Generator

Requires 500 K of Memory.

Camera User Interface 300

Memory in Use: 300K  
Available Memory: 2100K

Review 380

Capture 382

Auto Config 352

Build Camera 356

Backup 350

Restore 354

View 320

Demo 322

Install 330

FIG 6


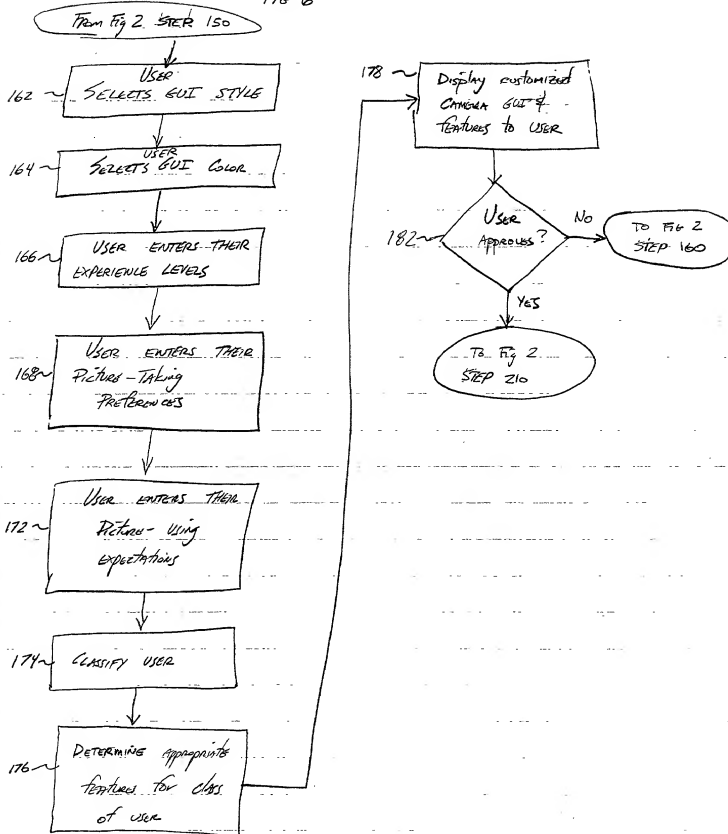


Fig. 7

52

Favorite

Stills:



O LENSING




O LUMINANCE

● BUSINESS

} 418

Favorite

Color Set



} 420

} 428

Have you used

digital camera before

film CAMERA

Have you used PCs

SELDOM

Occasionally

Lots

●

○

○

●

○

○

○

○

●

} 430

What do you like

Never

Seldom

Sometimes, often

to take photos of: Groups or People

Faces / Portraits

Fast moving (Sports)

Close-ups (Flowers, equipment)

Far away (Scenery)

○

○

●

○

○

○

○

●

●

○

○

○

○

○

○

●

○

●

○

○

} 440

How will you use

your digital photos:

Color Photo print

Web pages

Photo Enlargements

Electronic Documents

Never

Seldom

Sometimes

Often

○

●

○

○

○

○

○

●

●

○

○

○

○

○

●

○

} 450

Figure 8 - Image processing flow diagram

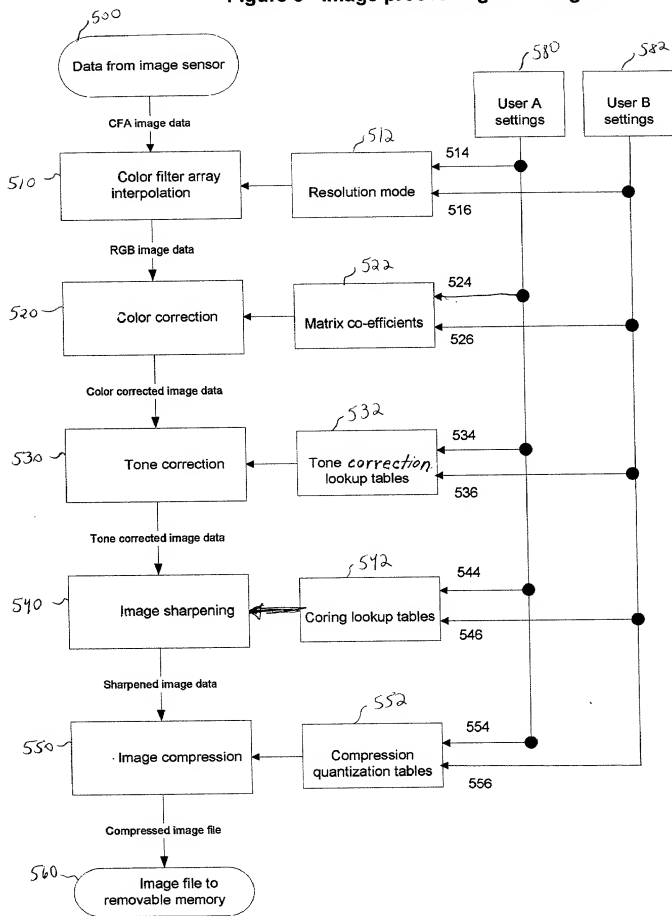


Fig. 9


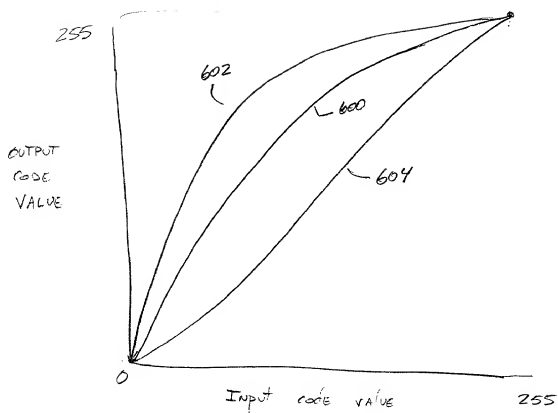


Fig 10

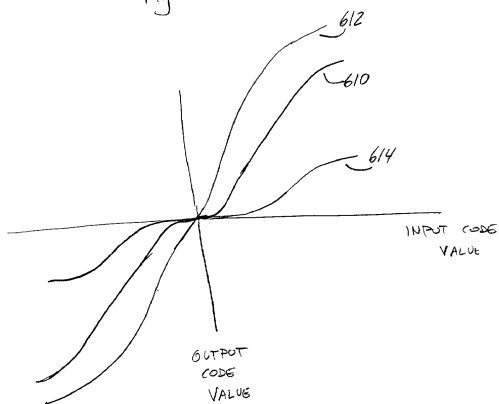

110  
100  
90  
80  
70  
60  
50  
40  
30  
20  
10  
0  
-10  
-20  
-30  
-40  
-50  
-60  
-70  
-80  
-90  
-100